

ELECTRIC

**GX-SERIES
POWER
PUMPS**



SIMPLEX



GX-Series

Useable Oil Capacity▶ 1.5, 2.5 and 5 gallons
 Flow @ Rated Pressure▶ 18 and 50 cu.in./min.
 Maximum Pressure▶ 10,000 psi


- ▶ Powered by a 1.7 hp universal motor
115 V - 60 Hz or 230 V - 50 Hz.
- ▶ Low startup voltage, draws 11 Amps at full load 115 V and 9.5 Amps at full load 230 V.
- ▶ Equipped with a 10' remote power controlled pendant.
- ▶ Reservoirs available in 1.5, 2.5 and 5.0 gallons; welded steel design.
- ▶ Intermittent pump use. Ideal for use with small, mid sized hydraulic cylinders or tools.



SUC-O-MATIC VALVE

The 3 position / 3 way "Suc-O-Matic" valve draws hydraulic oil out of any single acting cylinder with full retraction regardless of weak springs or mounting.

Reservoir (gallons)	Dimensions (inches)		
	A	B	C
1.0	16.3	9.4	18.7
2.5	17.5	12.0	18.3
5.0	17.5	16.7	20.3

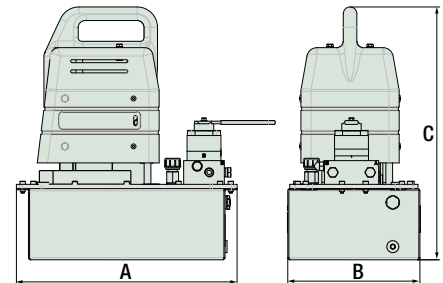

Model	Pressure Rating (psi)		Output Flow (cu.in)		Motor Specifications				Valve Type	10 ft Pendant Control	Useable Oil (gal)	Weight (lbs)
	1st stage	2nd stage	1st stage	2nd stage	(VAC)	(Amps)	(Hz)	(hp)				
GX113	400	10,000	270	18	115 V, NA-plug	11	60	1.7	3/3 manual	Motor	1.0	53
GX114	400	10,000	270	18	115 V, NA-plug	11	60	1.7	4/3 manual	Motor	1.0	53
GX123	400	10,000	270	18	230 V, NEMA-plug	5.5	60	1.7	3/3 manual	Motor	1.0	53
GX124	400	10,000	270	18	230 V, NEMA-plug	5.5	60	1.7	4/3 manual	Motor	1.0	53
GX133	400	10,000	270	18	230 V, AUS-plug	5.5	50	1.7	3/3 manual	Motor	1.0	53
GX134	400	10,000	270	18	230V, AUS-plug	5.5	50	1.7	4/3 manual	Motor	1.0	53
GX313	1100	10,000	650	50	115 V, NA-plug	17	60	1.7	3/3 manual	Motor	2.5	75
GX314	1100	10,000	650	50	115 V, NA-plug	17	60	1.7	4/3 manual	Motor	2.5	75
GX315	1100	10,000	650	50	115 V, NA-plug	18	60	1.7	4/3 solenoid	Motor / Solenoid	2.5	80
GX323	1100	10,000	650	50	230 V, NEMA-plug	9	60	1.7	3/3 manual	Motor	2.5	75
GX324	1100	10,000	650	50	230 V, NEMA-plug	9	60	1.7	4/3 manual	Motor	2.5	75
GX325	1100	10,000	650	50	230 V, NEMA-plug	9.5	60	1.7	4/3 solenoid	Motor / Solenoid	2.5	80
GX333	1100	10,000	650	50	230 V, AUS-plug	9	50	1.7	3/3 manual	Motor	2.5	75
GX334	1100	10,000	650	50	230 V, AUS-plug	9	50	1.7	4/3 manual	Motor	2.5	75
GX335	1100	10,000	650	50	230 V, AUS-plug	9.5	50	1.7	4/3 solenoid	Motor / Solenoid	2.5	80
GX513	1100	10,000	650	50	115 V, NA-plug	17	60	1.7	3/3 manual	Motor	5.0	97
GX514	1100	10,000	650	50	115 V, NA-plug	17	60	1.7	4/3 manual	Motor	5.0	97
GX515	1100	10,000	650	50	115 V, NA-plug	18	60	1.7	4/3 solenoid	Motor / Solenoid	5.0	102
GX523	1100	10,000	650	50	230 V, NEMA-plug	9	60	1.7	3/3 manual	Motor	5.0	97
GX524	1100	10,000	650	50	230 V, NEMA-plug	9	60	1.7	4/3 manual	Motor	5.0	97
GX525	1100	10,000	650	50	230 V, NEMA-plug	9.5	60	1.7	4/3 solenoid	Motor / Solenoid	5.0	102
GX533	1100	10,000	650	50	230 V, AUS-plug	9	50	1.7	3/3 manual	Motor	5.0	97
GX534	1100	10,000	650	50	230 V, AUS-plug	9	50	1.7	4/3 manual	Motor	5.0	97
GX535	1100	10,000	650	50	230 V, AUS-plug	9.5	50	1.7	4/3 solenoid	Motor / Solenoid	5.0	102